


12 Gauge 3" Smooth Bore Barrel

Issued: 05/29/1979


Revised: 12/24/2018

CARTRIDGE
 UNLESS OTHERWISE NOTED
 LENGTH TOL -.250 (6.35)

DO NOT SCALE
 FDIROM DRAWING

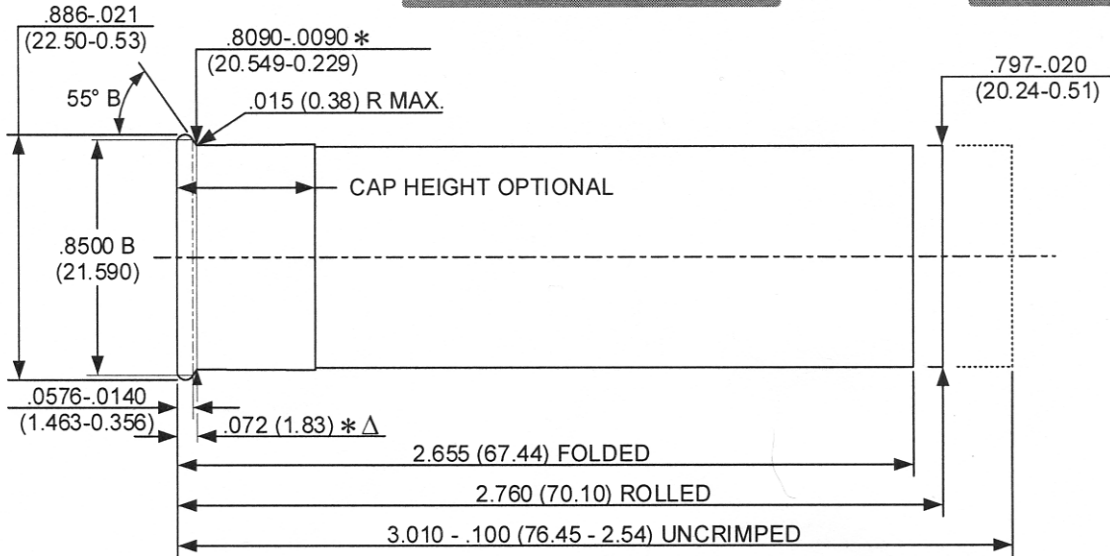

CHAMBER
 UNLESS OTHERWISE NOTED
 ALL DIA. +.005 (0.13)
 LENGTH TOL +.050 (1.27)

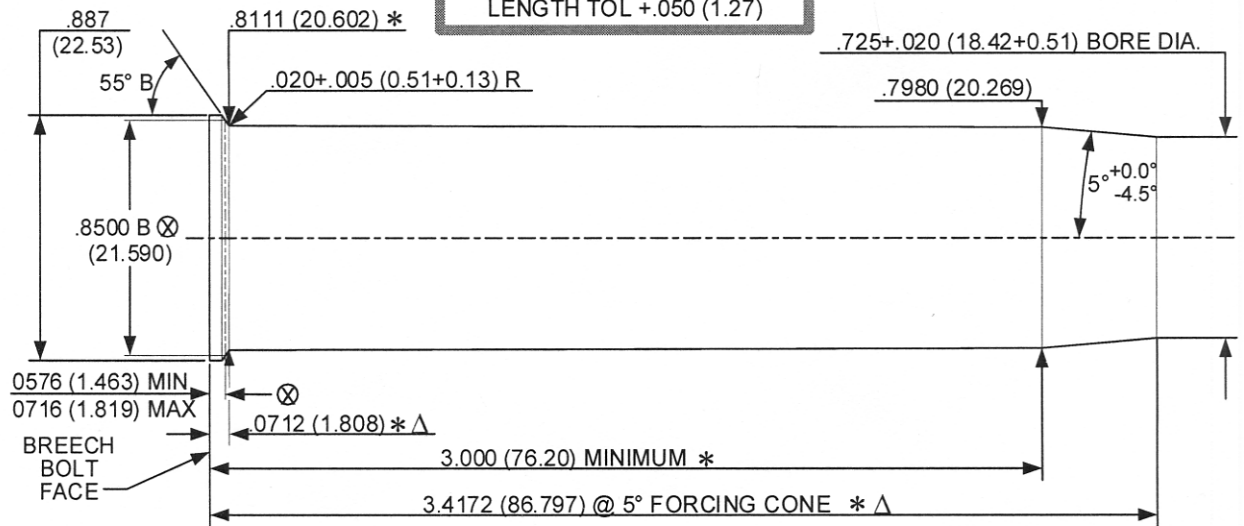

NOTE:
 B = BASIC Δ = REFERENCE DIMENSION ⊗ = HEADSPACE DIMENSION
 * DIMENSIONS ARE TO INTERSECTIONS OF LINES (XX.XX) = MILLIMETERS
 ALL CALCULATIONS APPLY AT MAXIMUM MATERIAL CONDITION (MMC)

CHAMBER LENGTHS HAVE BEEN INCREASED. FORMER CHAMBER DIMENSIONS ARE ALSO CONSIDERED SAFE PRACTICE.


12 Gauge 2 3/4" Smooth Bore Barrel

Issued: 05/29/1979


Revised: 12/24/2018

CARTRIDGE
 UNLESS OTHERWISE NOTED
 LENGTH TOL -.250 (6.35)

**DO NOT SCALE
 FROM DRAWING**

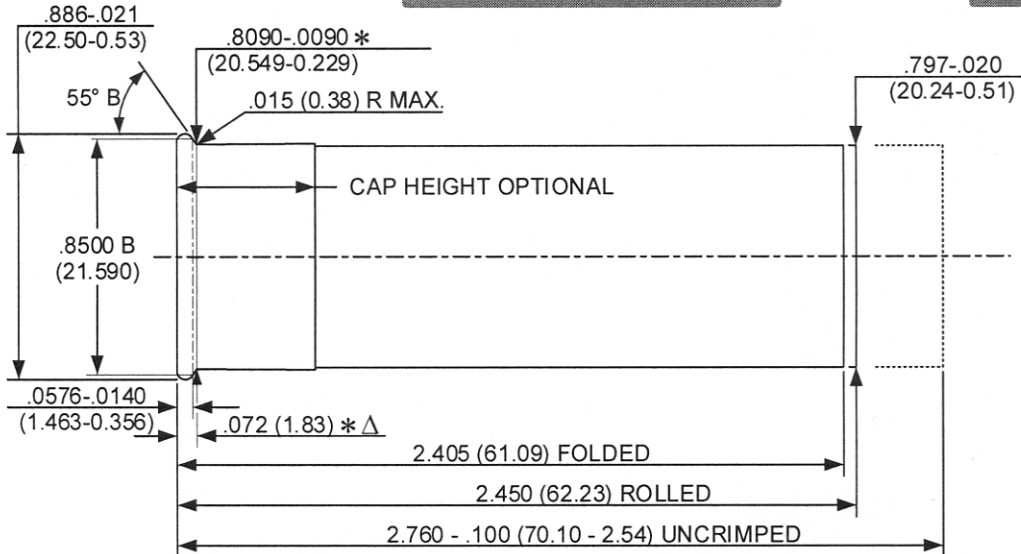

CHAMBER
 UNLESS OTHERWISE NOTED
 ALL DIA. +.005 (0.13)
 LENGTH TOL +.050 (1.27)

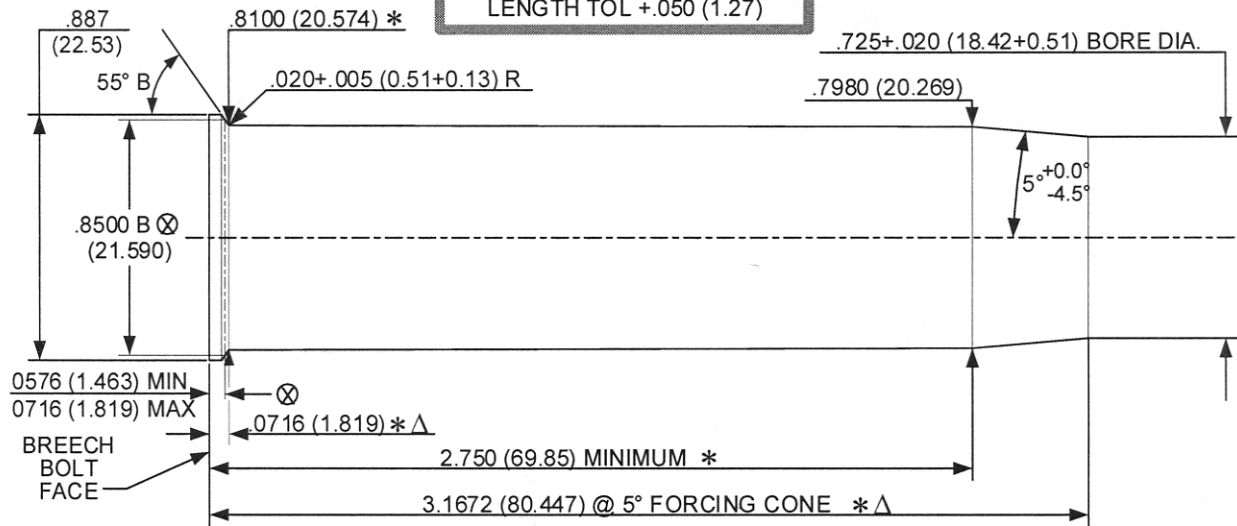

NOTE:

B = BASIC Δ = REFERENCE DIMENSION ⊗ = HEADSPACE DIMENSION
 * DIMENSIONS ARE TO INTERSECTIONS OF LINES (XX.XX) = MILLIMETERS
 ALL CALCULATIONS APPLY AT MAXIMUM MATERIAL CONDITION (MMC)

CHAMBER LENGTHS HAVE BEEN INCREASED. FORMER CHAMBER DIMENSIONS ARE ALSO CONSIDERED SAFE PRACTICE.